

Guidelines for Warning decals

June 2011


Warning Decals

"If the presence of glass in a door, side panel or a panel capable of being mistaken for a doorway or opening is not made apparent by transoms, colonial bars or other components of the glazing system, or other decorative treatment such as being opaque or patterned, the glass shall be marked to make it visible."

The Australian Standards state that warning decals shall comply with either A or B:

A. Marking shall be in the form of a continuous opaque band or repeated markings not less than 20mm high and 60% of the visible daylight opening width where the spacing between markings does not exceed 25mm.

B. A broken line or patterns using company logos shall be an acceptable form of marking provided it meets the other criteria outlined in AS1288.

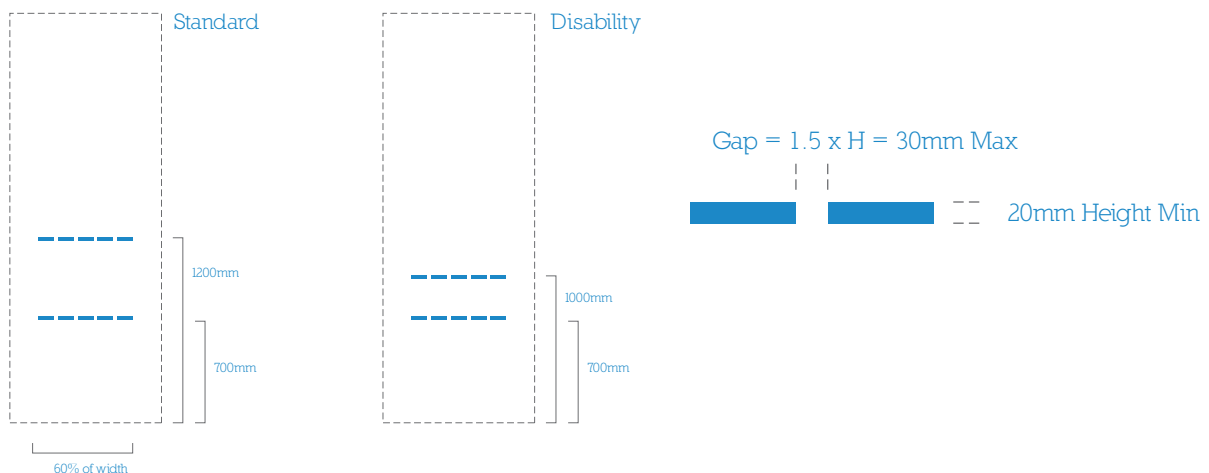

The information above has been adapted from the current Australian Standards and is to be used as a guideline only. Please refer to the current Australian Standards for further information.

vision effex
 precision cut
 office fitouts
 signage
 solar
 glass protection

1/209 Liverpool Road
 Kilsyth Victoria 3137

P (03) 9724 5100
 F (03) 9728 8443

admin@tintdesign.com.au
 tintdesign.com.au